
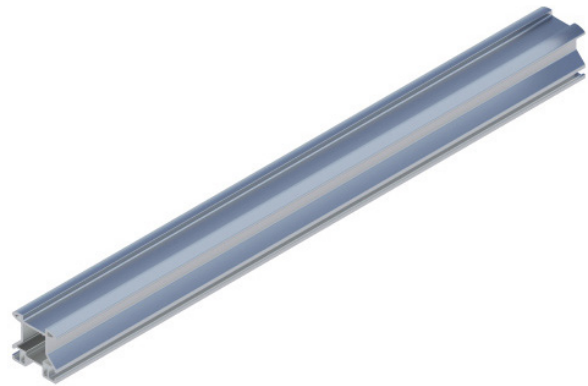


Monorail Tracks

CG60

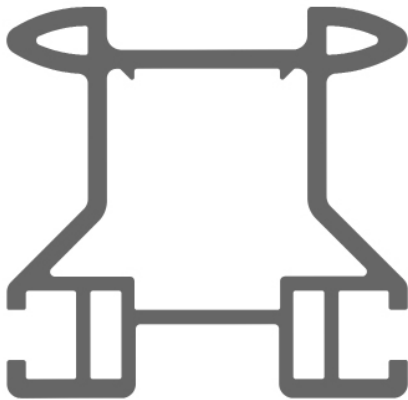

Design Standard	EN 1808
Track Type	CG60
Dimensions	84 mm x 82 mm
Weight	4.56 kg/m
Yield Limit	240 N/mm ²
Minimum Horizontal Bend Radius	900 mm
Typical Bracket Span	1.2 m – 1.7 m
Bracket Fastening	Top
Fastening Method	2 x M16 bolts for each bracket
Material	Aluminium alloy 6061-T6
Finish	Mill finish
Optional Surface Treatment	Anodized
Optional Colors	RAL 7004 RAL 9010

The CoxGomyl™ monorail is the ideal facade maintenance system for buildings with limited roof space. It can be installed with minimal visual impact respecting the architectural aesthetic. It consists of aluminium tracks in combination with the CoxGomyl trolley CG60MPT as an abseil solution.

CoxGomyl CG60 tracks are designed for top arrangement and abseil solutions complying without showing permanent deformation under the most unfavourable load conditions. Suitable for indoor and outdoor installations.

Only the CoxGomyl trolley CG60MPT is suitable to be used with CG60 track.